

PVDF Pump Tube




STANDARD's PVDF pump tube is engineered for transferring highly concentrated and aggressive liquids. Robust PVDF offers excellent durability and chemical resistance.

Applications:


- Concentrated Nitric Acid
- Sulfuric Acid-66 Baume
- Sodium Hypochlorite
- Hydrofluoric Acid
- Propionic Acid
- Stearic Acid

Technical Data

- Wetted Materials:** PVDF, Carbon, Hastelloy
- Maximum Viscosity:** 1500 cps (mPas) (SP-280P, SP-ENC)
750 cps (mPas) (SP-A2)
450 cps (mPas) (SP-A1)
- Discharge Options:** 1" (25 mm) / .75" (19 mm) Hose Barb
- Pump Design:** Seal-less / Centrifugal
- Maximum Specific Gravity:** 1.8
- Maximum Temp:** 175° F (80° C)

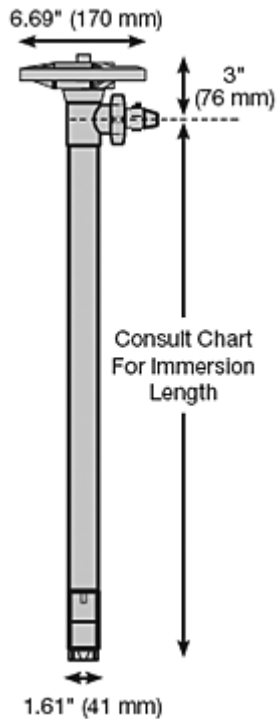

Model	Assembly	Immersion Length	Shaft	Impeller
SP-PVDF-27	PVDF	27" (700 mm)	Hastelloy	High Volume
SP-PVDF-39	PVDF	39" (1000 mm)	Hastelloy	High Volume
SP-PVDF-47	PVDF	47" (1200 mm)	Hastelloy	High Volume
SP-PVDF-50	PVDF	50" (1270mm)	Hastelloy	High Volume
SP-PVDF-60	PVDF	60" (1500 mm)	Hastelloy	High Volume
SP-PVDF-72	PVDF	72" (1800 mm)	Hastelloy	High Volume
SP-PVDF-HH-27	PVDF	27" (700 mm)	Hastelloy	High Pressure
SP-PVDF-HH-39	PVDF	39" (1000 mm)	Hastelloy	High Pressure
SP-PVDF-HH-47	PVDF	47" (1200 mm)	Hastelloy	High Pressure
SP-PVDF-HH-50	PVDF	50" (1270mm)	Hastelloy	High Pressure
SP-PVDF-HH-60	PVDF	60" (1500mm)	Hastelloy	High Pressure
SP-PVDF-HH-72	PVDF	72" (1800 mm)	Hastelloy	High Pressure

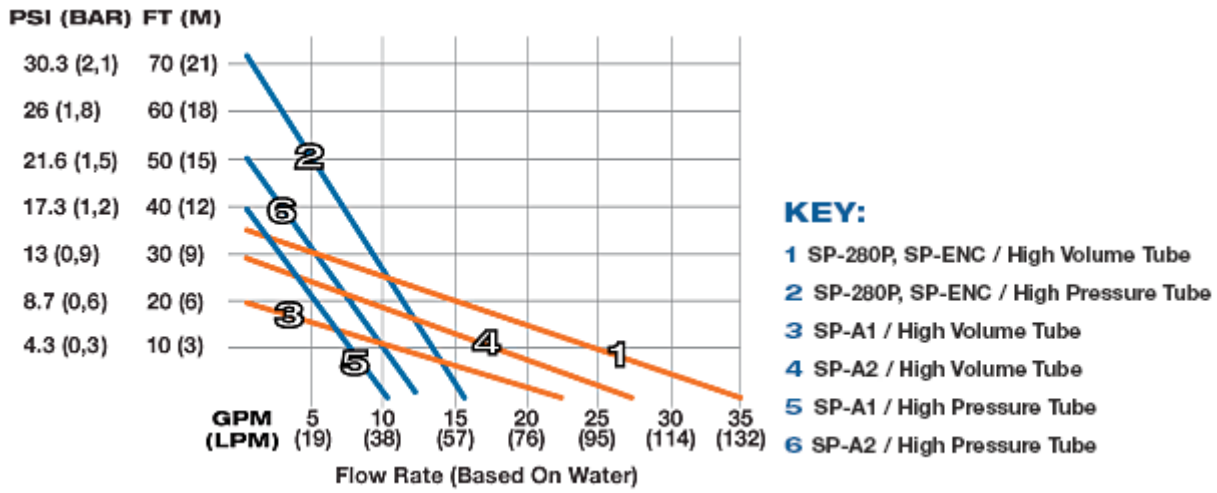

Warning: Not suitable for pumping flammable or combustible liquids