


J.L. WINGERT CO.

P.O. Box 6207 • Garden Grove, CA 92846-6207 / 11800 Monarch Street • Garden Grove, CA 92841-2113
 Phone (714) 379-5519 • Fax (714) 379-5549 ■ Email: customerservice@jllwingert.com
 Northern California Region • Phone (510) 487-5310 ■ Southwest Region • Phone (602) 470-1015
 www.jllwingert.com

MANUFACTURING: Mixers, Bypass Feeders, Filter Feeders, Bromine Feeders, Sample Coolers, Sludge Traps, Separators, Separator Systems, Tank Stands,
 Tank Package Systems, Glycol Feed Systems, Coupon Racks, Control Stations, NEMA Enclosures, Custom Packaged Systems and Specialty Welding

Specification Sheet #012011 Rev. "F" (04/04)

MODEL C-1-TE-[H/PRP/A] / C-2-TE-[H/PRP/A]

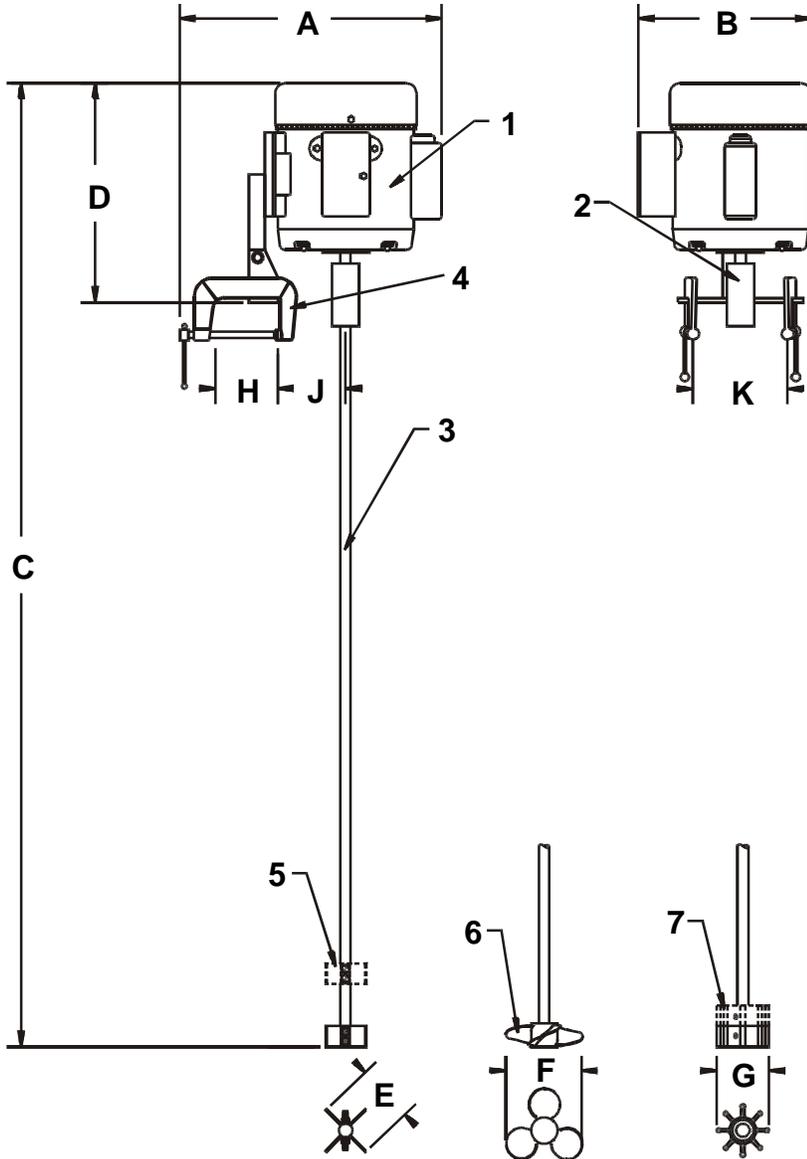

SPECIFICATIONS:

KEY	PART	DESCRIPTION
1	0401-E	MOTOR: 1/4 HP, 115/230V, TEFC
	0402-E	MOTOR: 1/3 HP, 115/230V, TEFC
2	0254	COUPLING: 5/8" x 1/2" bored brass coupling with stainless set screws
3	0315/34	SHAFT: 1/2" D x 34" L, 304 stainless steel shaft, prepped for one neoprene impeller, one propeller or one set stainless impeller. (C-1 mixers)
	0315	SHAFT: 1/2" D x 36" L, 304 stainless steel shaft, prepped for one neoprene impeller, one propeller or two sets stainless impellers. (C-2 mixers)
4	0239	MOUNT: Dual 3" adjustable c-clamps welded to a 3 position, bolt secured base with plated steel hardware
5	0265	[H] SS IMPELLER: 304 stainless steel 2 hole impellers with mounting hardware. (C-1 = qty 1, C-2 = qty 2)
6	0269	[PRP] PROPELLER: 4" D, 316 stainless steel marine style propeller, 1/2" bore (C-1 & C-2 = qty 1)
7	0263	[A] NEOPRENE IMPELLER: Medium neoprene impeller, 1/2" bore (C-1 = qty 1)
	0264	[A] NEOPRENE IMPELLER: Large neoprene impeller, 1/2" bore. (C-2 = qty 1)

NOTE: All replacement parts are based on standard mixer model number

DIMENSIONS, WEIGHT & CUBE:

KEY	C-1-TE-[]	C-2-TE-[]
A	11"	11"
B	8 1/4"	8 1/4"
C	44 3/4"	46 3/4"
D	10 1/2"	10 1/2"
E	2 3/8" diameter	2 3/8" diameter
F	4" diameter	4" diameter
G	2 1/2" diameter	2 1/2" diameter
H	3"	3"
J	3 1/4"	3 1/4"
K	4 1/2"	4 1/2"
Weight	33 lbs. approx.	33 lbs. approx.
Cube	10 3/8" X 12 3/8" X 36"	

MOTOR DATA:	C-1-TE-[]	C-2-TE-[]
Voltage	115 / 230	115 / 230
Phase / Hertz	1 / 60	1 / 60
Full Load Amps	5.8 / 2.9	6.6 / 3.3
Service Factor	1.15	1.15
Insulation Class	A	A

Note: All dimensions are +/- 1/8". All weights are approximate. All dimensions are subject to change without notice.