
P.O. Box 6207 • Garden Grove, CA 92846-6207 / 11800 Monarch Street • Garden Grove, CA 92841-2113 Phone (714) 379-5519 • Fax (714) 379-5549 ■ Email: customerservice@jlwingert.com Northern California Region • Phone (510) 487-5310 ■ Southwest Region • Phone (602) 470-1015 www.jlwingert.com

MANUFACTURING: Mixers, Bypass Feeders, Filter Feeders, Bromine Feeders, Sample Coolers, Sludge Traps, Separators, Separator Systems, Tank Stands, Tank Package Systems, Glycol Feed Systems, Coupon Racks, Control Stations, NEMA Enclosures, Custom Packaged Systems and Specialty Welding Specification Sheet #012021 Rev. "D" (6/99)

MODEL C-3-TE-[H/PRP/A] / C-4-TE-[H/PRP/A]

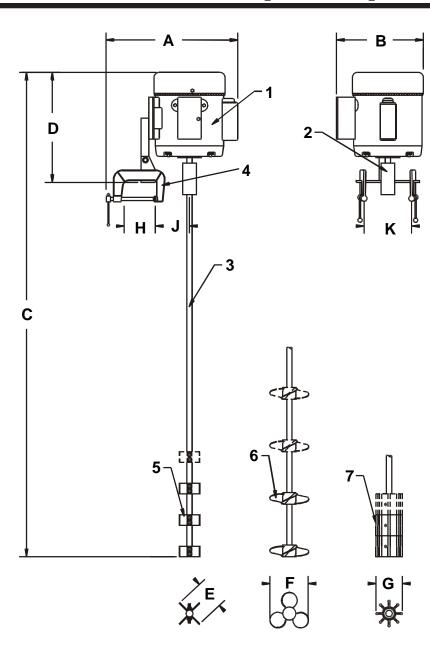

SPECIFICATIONS:

KEY	PART	DESCRIPTION	
1	0403-E	MOTOR: 1/2 HP, 115/230V, TEFC	
	0404-E	MOTOR: 1 HP, 115/230V, TEFC	
2	0254	COUPLING: 1/2" x 5/8" bored brass coupling with stainless set screws	
	0255	COUPLING: 5/8" x 5/8" bored brass coupling with stainless set screws	
3	0315	SHAFT: 1/2" D x 36" L, 304 stainless steel shaft, prepped for # sets of impellers / propellers	
	0316/44	SHAFT: 5/8" D x 44" L, 304 stainless steel shaft, prepped for # of sets of impellers / propellers	
4	0239	MOUNT: 3" double c-clamps welded to a 3 position angle plate	
5	0265	[H] SS IMPELLER: 304 stainless steel 2 hole impellers with mounting hardware	
6	0269	[PRP] PROPELLER: 316 stainless steel marine style propeller, 1/2" bore	
	0270	[PRP] PROPELLER: 316 stainless steel marine style propeller, 5/8" bore	
7	0264	[A] NEOPRENE IMPELLER: Large neoprene impeller, 1/2" bore	
	0264-1	[A] NEOPRENE IMPELLER: Large neoprene impeller, 5/8" bore	

NOTE: All replacement parts are based on standard mixer model number

DIMENSIONS, WEIGHT & CUBE:

KEY	C-3-TE-[]	C-4-TE-[]	
Α	12 5/8"	12 5/8"	
В	8 1/4"	8 1/4"	
С	47 1/4"	56 1/4"	
D	10 1/2"	12 1/2"	
Е	2 3/8" diameter	2 3/8" diameter	
F	4" diameter	4" diameter	
G	2 1/2" diameter	2 1/2" diameter	
Н	3 3/8"	3 3/8"	
J	3 1/4"	3 1/4"	
K	5 3/8"	5 3/8"	
Weight	33 lbs. approx.	41 lbs. approx.	
Cube	10 3/8" X 12 3/8" X 36"	10 3/8" X 12 3/8" X 44"	

MOTOR DATA:	T-3-TE-[]	T-3.5-TE-[]
Voltage	115 / 230	115 / 230
Phase / Hertz	1 / 60	1 / 60
Full Load Amps	9.0 / 4.5	11.4 / 5.7
Service Factor	1.15	1.15
Insulation Class	В	В

Note: All dimensions are +/- 1/8". All weights are approximate. All dimensions are subject to change without notice.